

S

HiPath TAPI 120 Installation Instructions



Content

1 Installation Instructions	1
1.1 Short description	1
1.2 Requirements	2
1.3 Installation preparations	3
1.4 Installation and configuration of HiPath TAPI 120	4
1.4.1 Installation of HiPath TAPI 120	4
1.4.2 Configuration of HiPath TAPI 120	6
1.4.3 Activation of the configuration dialog after installation	8
1.4.4 Uninstall HiPath TAPI 120	10

Content

1 Installation Instructions

1.1 Short description

General

The HiPath TAPI 120 enables Microsoft TAPI applications to control assigned telephones.

HiPath TAPI 120 is derived from CTI TAPI 3P. Running both TAPI drivers on the same machine is no possible.

Features

The following features are available:

- outgoing connection setup
- incoming call acceptance
- dropping of calls
- display of call state, display of caller id, display of caller name (internal calls)
- logging of calls
- call pickup (group)
- consultation hold
- toggling between calls
- call transfer, speed extend, call park / hold
- conference
- call forwarding, do not disturb
- additional information for redirected calls
- data exchange between TAPI applications

TAPI application: Example

The easiest way to work with TAPI is to use the default Windows application *Dialer*. It is possible to start outgoing calls with this application.

Installation Instructions

Requirements

1.2 Requirements

Software requirements

- Windows NT 4.0 with Service Pack 4
- **or** Windows 2000
- **or** Windows ME
- **or** Windows 98
- **or** Windows 95
incl. TAPI-update to TAPI-Version 2.1, incl. Year-2000-Update and incl. Internet Explorer
Version 4.01 SP2

1.3 Installation preparations

Preparations under Windows 95

HiPath TAPI 120 requires TAPI version 2.0. By default Windows 95 supports TAPI 1.4. Therefore a TAPI update to version 2.1 has to be installed under Windows 95. You can find the update file(s) in the internet on the page:

<http://support.microsoft.com/support/platformsdk/kernelbase/downloads.asp>



Install this TAPI update only on PCs with Windows 95!

Updating TAPI 2.1 for Windows 95:

Proceed the following steps only under Windows 95:

Schritt	Vorgehen
1	Check the existance of the <i>Telephony</i> symbol under <i>Start - Settings - Control Panel</i> . If this symbol ist not existing , change to the system directory on the PC and re-name the file TELEPHON.CP\$ to TELEPHON.CPL.
2	Change to the folder with the TAPI update file. Execute the update file Tapi2195.exe.
3	The TAPI update proceeds. Then restart the PC.

Installation Instructions

Installation and configuration of HiPath TAPI 120

1.4 Installation and configuration of HiPath TAPI 120

1.4.1 Installation of HiPath TAPI 120

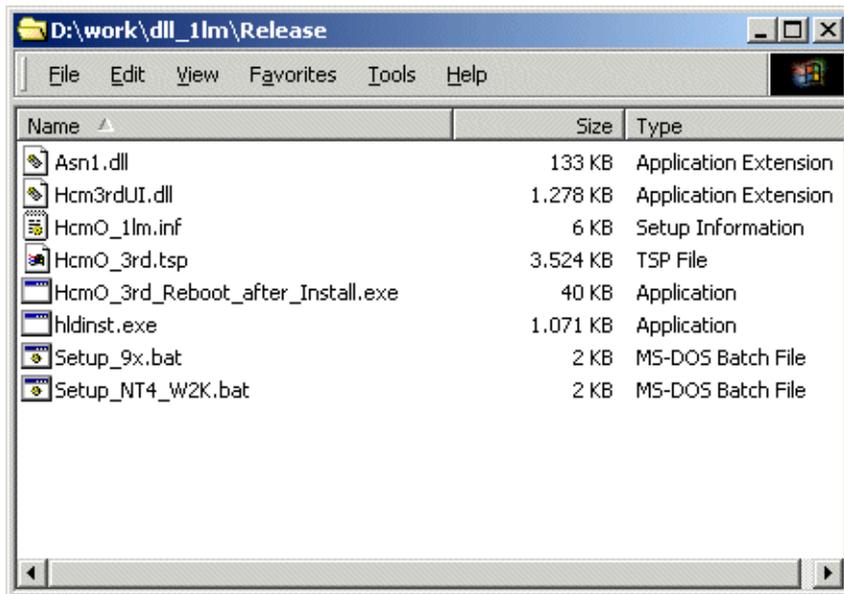


If (another) CTI TAPI is installed on the PC, you have to uninstall this version before installing HiPath TAPI 120. For uninstalling this driver please follow the description in Abschnitt 1.4.4.

Furthermore you have to find and delete the file `CSTA2Ext.dll` on the PC.

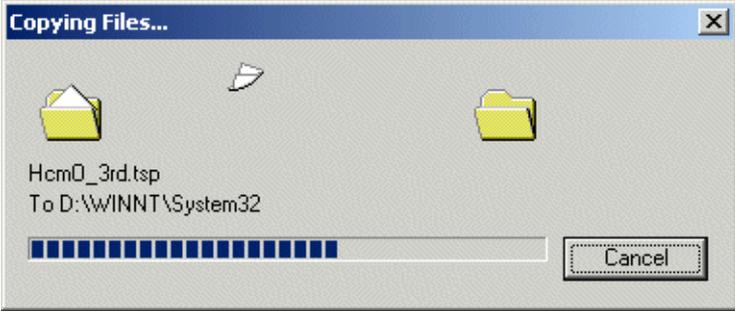
Installation media

The installation media for HiPath TAPI 120 (e.g. CD) contains the following setup files:



To install HiPath TAPI 120 proceed as follows:

Step	Procedure	
	under Windows 95 / 98 / ME	under Windows NT / 2000
1	Change to the inserted installation media (CD / Disk) or change to the installation folder.	
2	Execute the batch file <code>Setup_9x.bat</code> , e.g. by double click.	Execute the batch file <code>Setup_NT4_W2K.bat</code> , e.g. by double click.

Step	Procedure	
	under Windows 95 / 98 / ME	under Windows NT / 2000
3	The system copies the required files: 	
4	The setup process performs the requires steps: 	

 For installing and configuring the driver you need administrator privileges under Windows 2000 / Windows NT (local privileges). Please ask your network administrator if necessary.

Installation Instructions

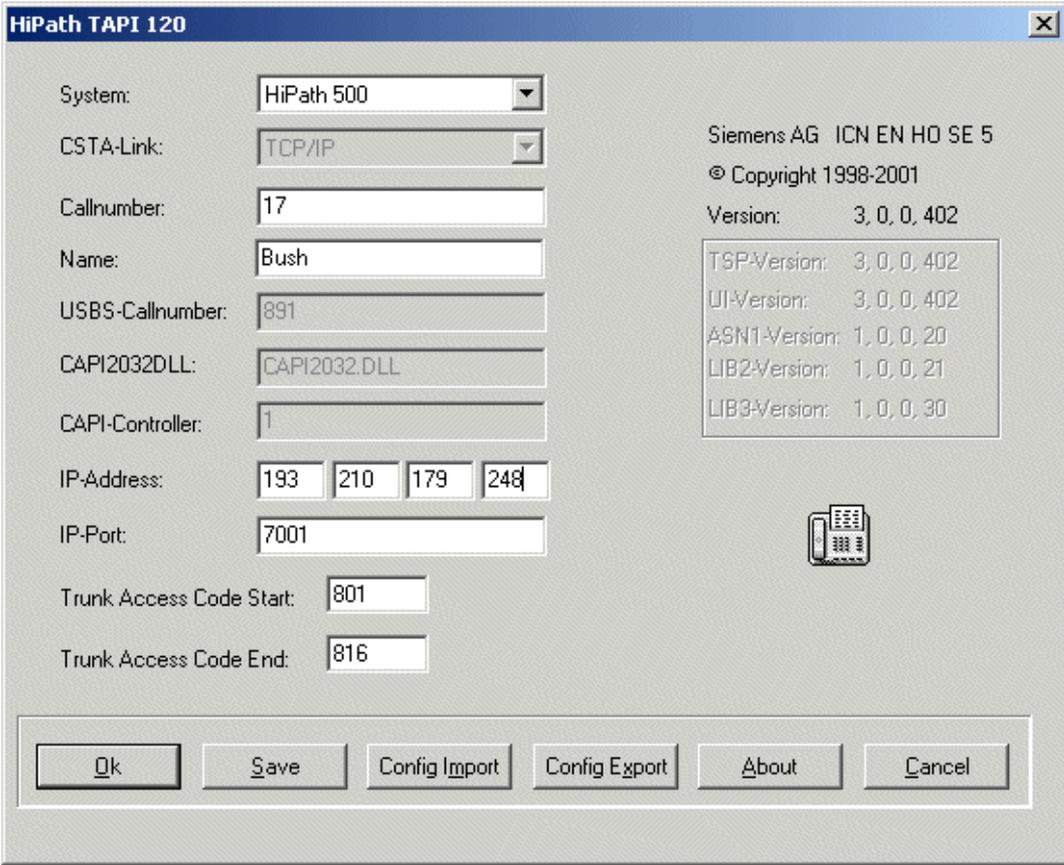
Installation and configuration of HiPath TAPI 120

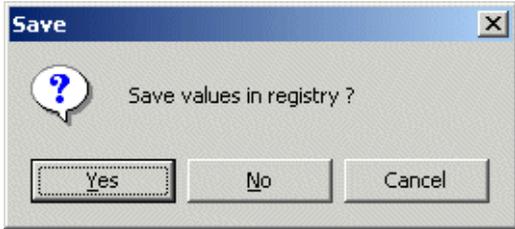
1.4.2 Configuration of HiPath TAPI 120

The configuration dialog

The configuration dialog is automatically activated after installation. You can change the settings after installation by activating the dialog via the *Start - Settings - Control Panel - Telephone and Modem Options*.

To configure HiPath TAPI 120 you proceed as follows:

Step	Procedure
1	<p>After installation the configuration dialog is activated automatically: (Examples for the system HiPath 500):</p> 
2	<p>Select the system in the list field <i>System</i>. Possible entries are:</p> <ul style="list-style-type: none">• HiPath 500• HG 1500

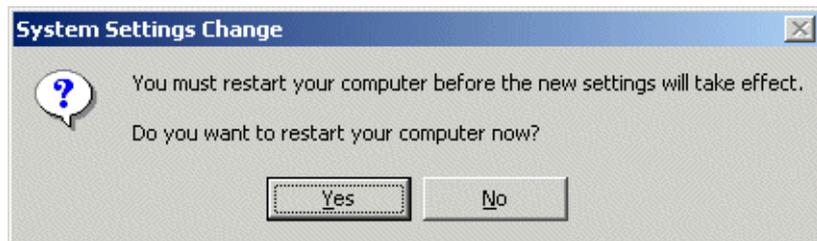
Step	Procedure
3	Depending on the selected system the field <i>CSTA-Link</i> shows one of the following connection types: <ul style="list-style-type: none"> ● for HiPath 500: CSTA via <i>TCP/IP</i> ● for HG 1500: CSTA via <i>VCAP</i> It is not possible to edit the field value.
4	Enter the <i>Callnumber</i> of the extension and the <i>Name</i> of the user in the appropriate fields.
5	After selection of the system <i>HG 1500</i> you can not edit the entries in the fields <i>USBS-Callnummer</i> , <i>CAP12032.DLL</i> and <i>CAP1-Controller</i> . Only by simultaneous operation of <i>VCAP</i> and <i>CAP1</i> with one PC adapter you can enter the driver and controller in these fields.
6	If connected to the system HiPath 500 you have to enter the IP adress of the HiPath 500 in the field <i>IP-Adress</i> . This adress is determined during installation / configuration of the HiPath 500 system.
7	If connected to the system HiPath 500 you have to enter the IP port of the HiPath 500 in the field <i>IP-Port</i> . The port number is determined during installation / configuration of the HiPath 500 system.
8	Enter the HiPath 500 range of trunk access codes in the fields <i>Trunk Access Code Start</i> and <i>Trunk Access Code Ende</i> . Usually you dont need to change the recommended values (depending on the selected system) in this fields.
Export / Import of the configuration settings	
9	You can click on the <i>Config Export</i> or <i>Config Import</i> button for exporting / importing the configuration settings in / from a selected file.
Save configuration settings	
9	Click on the <i>Save</i> button to save the settings. Quit the dialog by clicking on the <i>Ok</i> button. If you leave the dialog without saving your settings a message box appears: <div data-bbox="284 1438 799 1667" style="border: 1px solid black; padding: 5px; margin: 10px 0;">  </div> Click the <i>Yes</i> button if you want to change the actual settings.

Installation Instructions

Installation and configuration of HiPath TAPI 120

PC restart

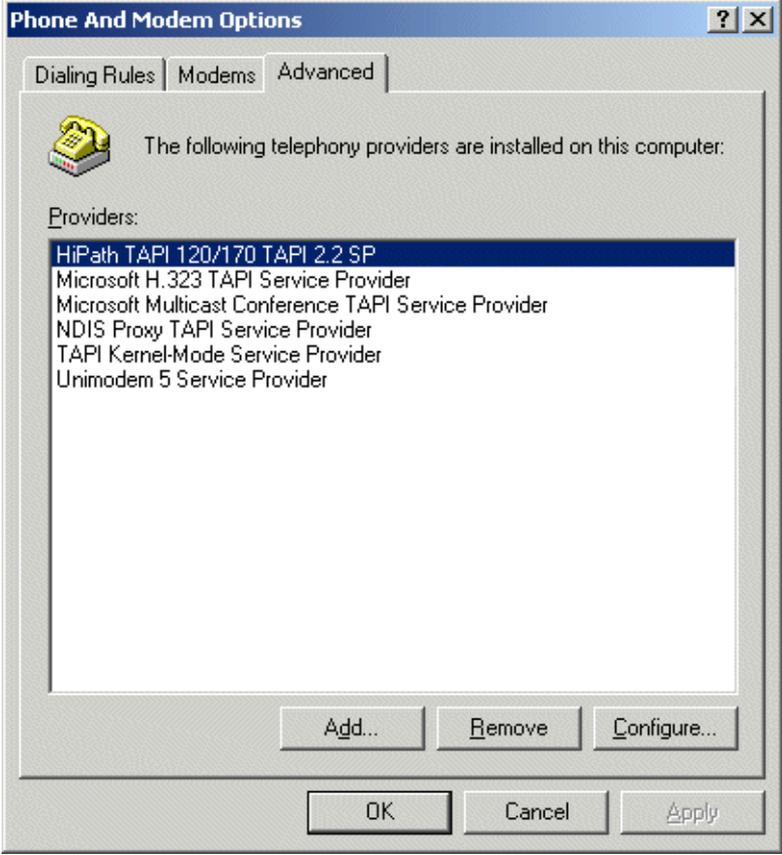
You must restart the computer before the settings will take effect. Confirm the following message with **Yes**:



1.4.3 Activation of the configuration dialog after installation

General

The configuration dialog is automatically activated after installation. For a later activation of the configuration dialog proceed as follows:

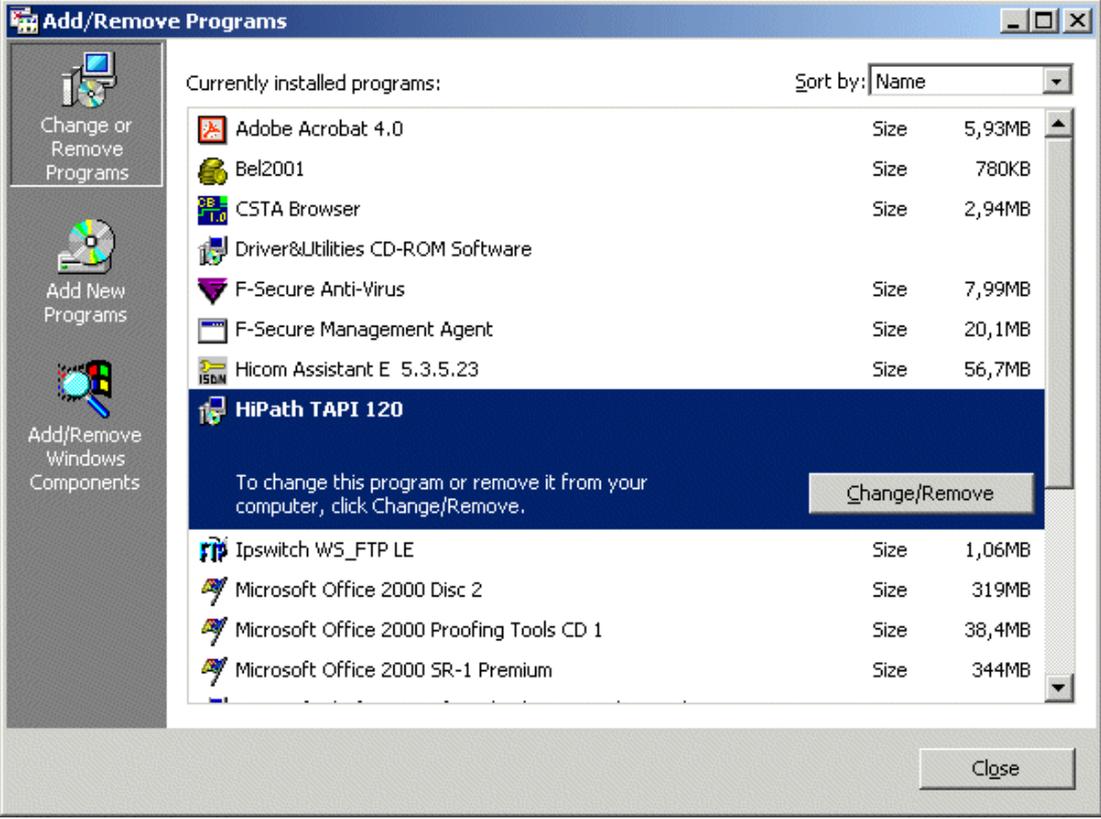
Step	Procedure
1	<p>Open <i>Start - Settings - Control Panel</i>. Double-click the symbol <i>Phone and Modem Options</i> and activate the entry <i>HiPath TAPI 120/170 TAPI 2.2 SP</i>:</p>  <p>The screenshot shows the 'Phone And Modem Options' dialog box with the 'Advanced' tab selected. A telephone icon is present. The text reads: 'The following telephony providers are installed on this computer:'. Below this is a list of providers: 'HiPath TAPI 120/170 TAPI 2.2 SP' (highlighted), 'Microsoft H.323 TAPI Service Provider', 'Microsoft Multicast Conference TAPI Service Provider', 'NDIS Proxy TAPI Service Provider', 'TAPI Kernel-Mode Service Provider', and 'Unimodem 5 Service Provider'. At the bottom are buttons for 'Add...', 'Remove', 'Configure...', 'OK', 'Cancel', and 'Apply'.</p>
2	Click the <i>Configure</i> button. The configuration dialog appears.

Installation Instructions

Installation and configuration of HiPath TAPI 120

1.4.4 Uninstall HiPath TAPI 120

To uninstall HiPath TAPI 120 proceed as follows:

Step	Procedure
1	<p>Open <i>Start - Settings - Control Panel</i>. Doubleclick the symbol <i>Add/Remove Programs</i> and activate the entry <i>HiPath TAPI 120</i>:</p> 
2	<p>Click the <i>Change/Remove</i> button and follow the instructions.</p>

Index

C

Configuration 1-6

Configuration dialog 1-8

D

Dialer 1-1

E

Example 1-1

F

Features 1-1

G

General 1-1

I

Installation 1-4

R

Requirements 1-2

U

Uninstall 1-10

W

Windows 95 1-3

